

SHANGHAI GOODVIEW ELECTRONICS TECHNOLOGY CO.LTD.

Commercial Touch Display

TC32M1 Specification

Revision History

Part No.	Version	Publish Date	Written By	Auditing	Approved	Remarks
1250138	GV-TC32M1-GGS20190126	2019\1\14	计富行	许小峰	孙加明	

Product information is subject to change without notice.

© 2019 Shanghai Goodview Electronics Technology Co., Ltd.

All rights reserved.

Product Specification

Display		
Panel	32 inches LED Backlight	
Display Area (mm)	698.4 (H) ×392.9(V)	
Aspect Ratio	16:9	
Resolution	1920×1080	
Brightness	350 cd/m2	
Contrast Ratio	1100:1	
View Angle (CR>10)	Full view (R/L 89 (Min.), U/D 89 (Min.))	
Display Color	8bit, 16.7 Million	
Color Temp.	10000K	
Backlight Life	30000 hours	
Respond Time	10ms	
System Solution	TSUMU56RU	
Touch		
Touch type	Capacitive	
Touch point	10	
Touch Resolution	16384*9600 (MAX)	
Touch precision	±1.5mm	
Response time	20-40ms	
Input way	finger, PCAP Pen	
Minimum Touch Object	Single point	/
	Multipoint	/
External ports	AC Switch×1 \ HDMI×2 \ VGA IN×1 \AUDIO IN \TOUCH USB	
Machine parameters		
Product size (mm)	757.8(H)×452.3(V)×49.3(D)	
Carton size (mm)	903(H)×583(V)×275(D)	
VESA (mm)	400×200	
Screen suspension mode	Horizontal、 Vertical	
Menu language	Chinese、 English	
Machine color	Black	
Weight	net: 9.7KG	gross: 11.3KG
Power consumption	50W (Max)	
Speaker	stereo 2×2W 4Ω	
Power supply	AC~100-240V (50/60Hz)	

Working Environment	0~40℃ 10% ~ 85%RH
Storage environment	-10~60℃ 10% ~ 90%RH
Accessories	1. power cord×1 2.The remote control×1 3. AAA battery × 2 4.M6×26 Stainless steel spacer× 5
Certificates	CCC/CE/UL/ETL

Schematic Drawing



Product Images




Confidential



Confidential



▪ Packaging

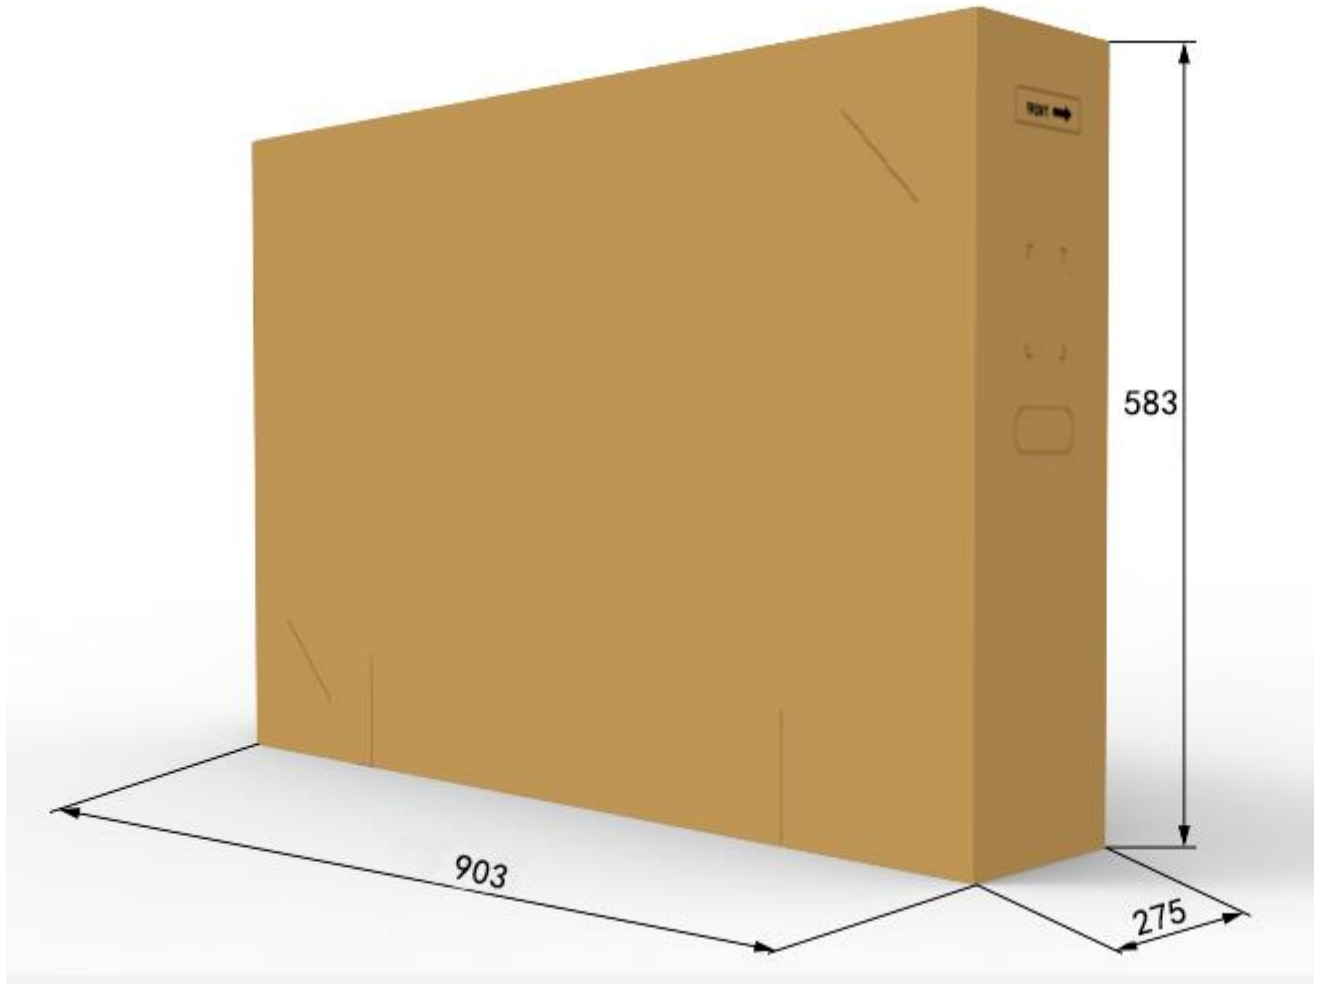

Note: All right reserved by Goodview. Please contact with us for the latest updates.