

Shanghai Goodview Electronics Technology Co. Ltd.

Multimedia LCD Monitor

Model:PF19EH7

Revision History

Part number	Version	Publish date	Written by	Auditing	Approval	Remarks
1250149	GV-CESSES-05-GGS20 190301	2019/03/01	张顺心	齐世军	张顺心	


Note: All right reserved by Goodview. Please contact with us for the latest updates.

Product Specifications


Display		
Panel	18.5 inches LED backlight	10.1 inches LED backlight
Active Area(mm)	409.8(H) × 230.4(V) mm (Typ.)	135.36(W) × 216.58(H) mm (Typ.)
Aspect Ratio	16:9	8:5
Resolution	1366×768	1280×800
Brightness	250 cd/m ²	250 cd/m ²
Contrast Ratio	1000:1	800:1
Viewing Angle	R/L 89 (Min.), U/D 89 (Min.)	(R/L 80 (Min.), U/D 80 (Min.))
Display Colors	16.7M	/
Color temperature	/	/
Life Expectancy	30000 hours	2000 hours
Response Time	14ms	25ms
System configuration		
Operating system	Android 5.1	
CPU	Four cores ARM Cortex A17 (max1.8GHz) ,	
GPU	Four cores ARMMail-764	
Memory	2GB DDR3	
Storage	8G eMMC	
External ports		
Signal ports	N/A	
Network ports	LAN*1 (10/100M Ethernet) 、WiFi (802.11bgn)	
Storage extension	Micro TF Card×1 32G (Max)	
Other ports	USB 2.0 (TypeA) ×3 SIM Card×1 (Standard) DC IN (12V)	
Multimedia		
media file formats	Video: MPEG1、MPEG2、MPEG4、H.264、WMV、MKV、TS、flv and other mainstream video formats	
	audio: MP3 and other audio formats.	
	picture: JPG、JPEG、BMP、PNG、GIF	
	text: txt	
Play mode	Vertical screen	
Program transmission mode	USB、LAN、Wan	
Machine parameters		
Product size (mm)	640 (H) ×274 (V) ×28 (D)	

Carton size (mm)	767 (H) × 380.5 (V) × 280 (D)
VESA (mm)	N/A
Screen suspension mode	Vertical
Menu language	English
Machine color	black
Weight	net: 3.5KG gross: 5KG
Power consumption	25W (Max)
Speaker	Stereo 1.5W 8Ω
Smart volume	/
Watchdog function	support
Timing	support
Management software	B/S framework: GTV Information Distribution System
Power supply	DC 12V
Working environment	0~40°C 10% ~ 85%RH No condensation
Storage environment	-10~60°C 10% ~ 75%RH No condensation
Accessories	1.Remote control x 1 2.AAA battery x 2 3.Plum screwdriver with hole x1(one for 40) 4.DC 12V adapter (SUN-1200400-039-I)
Certificates	CCC/CE/UL/ETL


Schematic Drawing

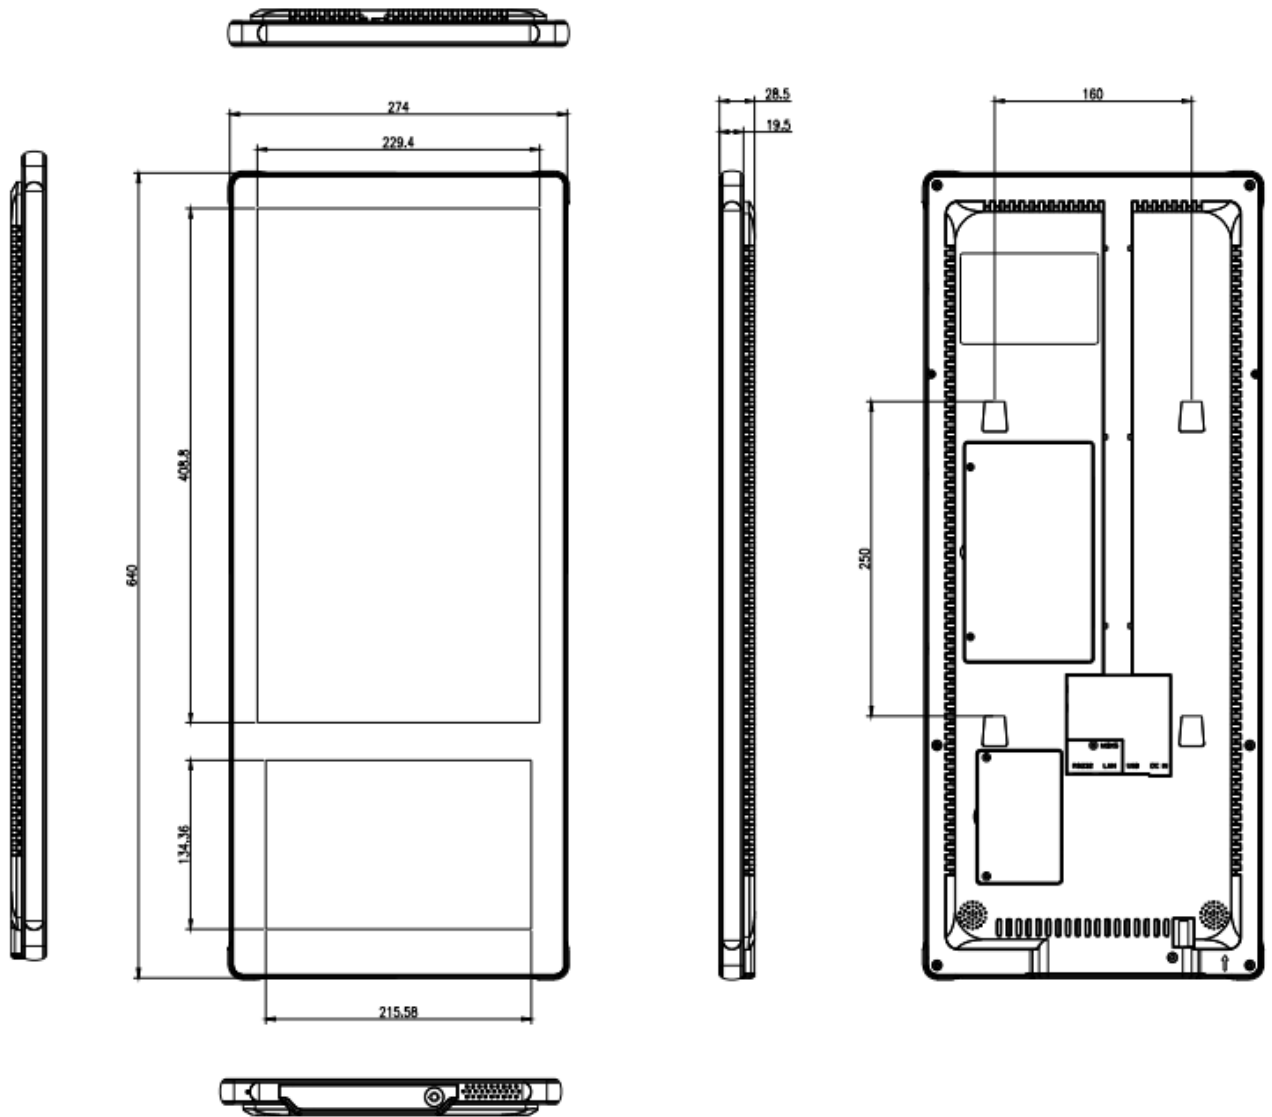

Product Images

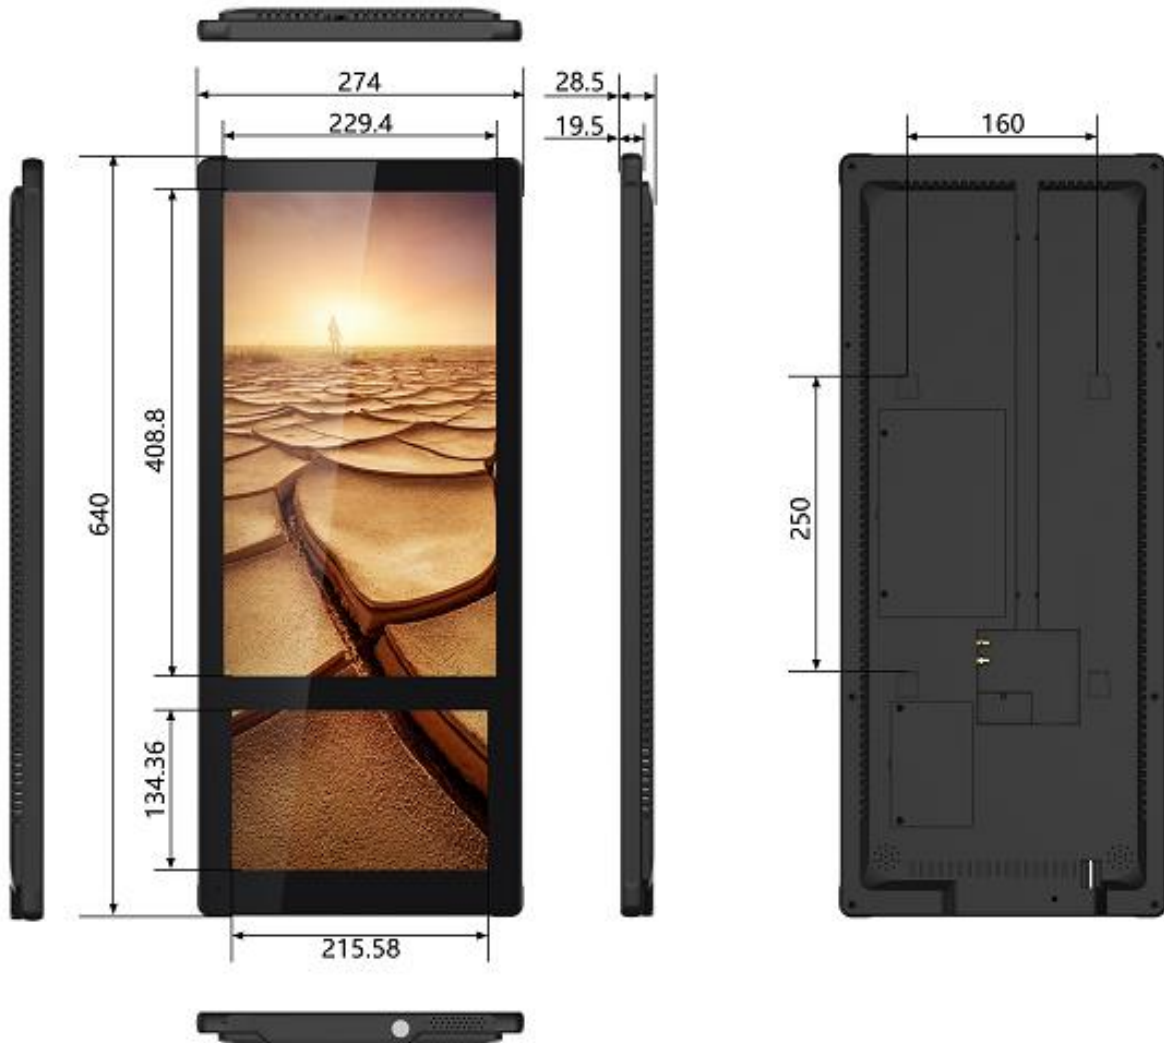

Packaging

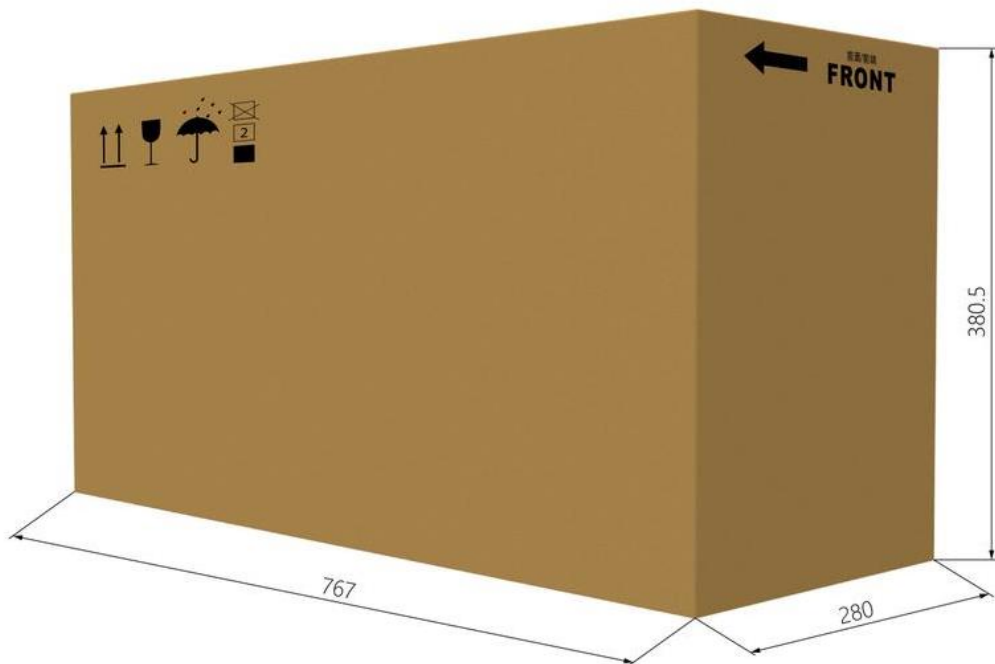

Note: All right reserved by Goodview. Please contact with us for the latest updates.